

HIGHLIGHTS

Sigma: The next generation of direct-to-card printing

Entrust Sigma ID Card Printers are specifically designed for today's cloud environments and give you the ability to easily issue secure identities.

- Simple: From unboxing to issuing ID cards and mobile flashpasses to managing your printer, we made sure Sigma was the most user-friendly ID card issuance solution in the world
- **Secure:** Our industry-leading issuance security architecture will help protect your cards and your customers' data during each step of the issuance process
- Smart: Forward-thinking technology and scalability allow you to expand your ID card program as your needs evolve

KEY FEATURES & BENEFITS The world's most user-friendly

The world's most user-friendly ID card printer

- Intuitive printer dashboard lets you see printer status, order supplies, check cleaning status, update firmware, or contact help - all from your mobile device
- Seamless self-service lets you access how-to videos and other helpful resources by simply scanning a QR code on the LCD display
- Variable LED light ring lets you incorporate brand colors or other customization into your ambient environment
- Pre-loaded ribbon cassettes make switching ribbons easy



Sigma DS3 Direct-to-Card Printer with Card Lamination Module


Unmatched security

- Optional Locks
- Secure boot protects system from malware or virus on boot-up
- Trusted Platform Module (TPM) manages the printer's own TLS/SSL certificates and keys
- Connection and data sent between software and printer is encrypted
- Customer data is encrypted and is not stored in the printer after printing is complete
- Security features added to cards protect from tampering and counterfeiting:
 - UV printing
 - Holographic laminates
 - Luster printing
 - Tactile impression

Flexibility and scalability built for the future

- Issuance capabilities include physical cards and digital mobile flashpass
- Choose on-premises or cloud-hosted deployment
- Expand your ID program as your needs change by adding multihopper, smart card capabilities, wi-fi connectivity, and more
- Print anytime, anywhere with your mobile device (iOS, Android, Windows)

STUDENT ID

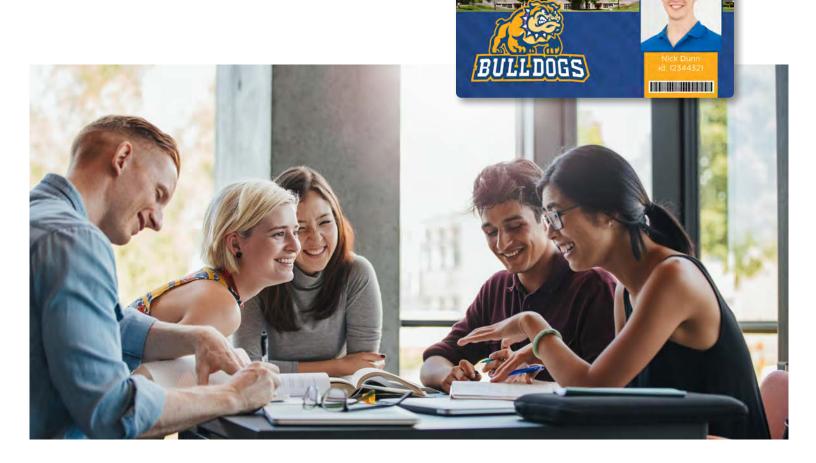



Sigma DS3 Direct-to-Card Printer with Card Lamination Module

TECHNICAL SPECIFICATIONS

Standard Features & Supplies

Print technology	Dye sublimation		
Print capabilities	Single or dual-sided		
Print resolution	300 dots per inch (dpi) (300 X 600, 300 X 1200)		
Print, lamination, and tactile speed	 Front side YMCK ribbon with front side lamination: up to 210 cards per hour Front side YMCK-K ribbon with front side lamination and back side K: up to 185 cards per hour Front side YMCK ribbon with lamination and tactile: up to 195 cards per hour Dual-sided YMCK K ribbon with lamination and tactile: up to 160 cards per hour 		
Card capacity	Input hopper: 125 cards Output hopper: 25 cards Reject hopper: 10 cards		
Card sizes	Thickness: 0.010 inches to 0.040 inches (0.25mm - 1.016mm) Dimension: ID-1, CR-79		
Operating environment	Temperature: 60°F to 95°F (15°C to 35°C) Humidity: 20-80% RH - non-condensing		
Physical dimensions	L 23.8 in x W 10.6 in x H 20.4 in / 60.4 cm x 27 cm x 51.9 cm		
Weight	30 lbs (13.62 kg); varies with options		
Connectivity	USB and Ethernet		
	36 months		





Sigma DS3 Direct-to-Card Printer with Card Lamination Module

TECHNICAL SPECIFICATIONS

Optional Features & Supplies

ISO 7811 three-track support (high- and low-coercivity) JIS Type II single-track option		
WiFi types: 802.11g/n Authentication modes: None, WPA2 Dual-band 2.4GHz and 5GHz		
Single wire or loosely coupled: • Contact smart card encoding: ISO 7816 T=0 (T=1), Class A 5V (3V and 1.8V) • Contactless smart card encoding: ISO 14443 - A, B, ISO 15693, MiFare Series, DESFire Series, HID IClass Series, HID Prox (125 KHZ)		
YMCKT ymcKT YMCKT-KT KT KTT YMCKF-KT YMCKL-KT ST-KT GT-KT	250/500 images 650 images 350 images 1000 images 750 images 300 images 500 images 500 images 500 images	
Black, white, blue, red, green, scratch-off, silver matte, gold matte, silver metallic, and gold metallic: 1500 images		
Clear or holo topcoat: DuraGard® clear or holo laminate (0.5, 0.6 or 1 mil): DuraGard® clear or holo laminate (1.0 mil): Clear DuraShield™ overlay**:		1000 images 350 images 300 images 500 images
	WiFi types: 802.11g/ Authentication mode Dual-band 2.4GHz at the single wire or loose Contact smart care Contactless smart series, DESFire Set the series, DESFire Set the single wire or loose MCKT ymcKT ymcKF-KT the structure of the single si	WiFi types: 802.11g/n Authentication modes: None, WPA2 Dual-band 2.4GHz and 5GHz Single wire or loosely coupled: • Contact smart card encoding: ISO 7816 T=0 (T=1), • Contactless smart card encoding: ISO 14443 - A, B Series, DESFire Series, HID IClass Series, HID Prox 6 YMCKT 250/500 images YMCKT 650 images YMCKT-KT 350 images KT 1000 images KT 1000 images YMCKF-KT 300 images YMCKL-KT 300 images YMCKL-KT 500 images ST-KT 500 images ST-KT 500 images YMCK & YMCK-KK 500 images Clear or holo topcoat: DuraGard® clear or holo laminate (0.5, 0.6 or 1 mil): DuraGard® clear or holo laminate (1.0 mil):

^{*} Color ribbon guide: Y=Yellow, M=Magenta, C=Cyan, K=Black, T=Topcoat, F=UV fluorescent, L=Luster, y=1/2 panel Yellow, m=1/2 panel Magenta, c=1/2 panel Cyan, S=Silver matte, G=Gold matte.

^{**} For use in conjunction with T-panel application



Davies Enterprises Ltd. 114 Chain Lake Drive Halifax, NS B3S1B1 (902 450 5075 www.davies enterprises.com





